Operator's Manual SUPPLEMENT

MODEL NO. 285-191 285-192

WARNING:
Read Engine
Owner's Manual,
Vehicle Operator's
Manual, and
Supplement
Carefully Before
Operating
Vehicle.

Parts List





THIS VEHICLE IS FOR OFF-ROAD USE ONLY


BEFORE OPERATING THIS VEHICLE, THE OWNER AND/OR OPERATOR MUST UNDERSTAND THE VEHICLE WAS NOT DESIGNED OR MANUFACTURED TO MEET SPECIFICATIONS FOR USE ON PUBLIC ROADS, STREETS, HIGH-WAYS, OR THOROUGHFARES AND HAVE READ AND HAVE AN UNDERSTANDING OF ALL THE INSTRUCTIONS FOR SAFE ASSEMBLY AND OPERATION AS WELL AS THE INSTRUCTIONS GOVERNING THE ENGINE AND OTHER PORTIONS OF THE VEHICLE.

REPAIR PARTS - MODEL 285-191/-192

REPAIR PARTS - MODEL 285-1917-192											
	DADT		REF.	PART							
REF.	PART	DESCRIPTION DESCRIPTION	NO.	<u>NO.</u>	DESCRIPTION ORD (incl. 63)						
<u>NO.</u> 1	<u>NO.</u> 9741-19	Frame	61	9514	Chain, #420 x 62P (incl. 62)						
ASM	1464	Tie Rod Assembly (incl. 2-6)	62	2037	Master Link, #420						
2 ASIVI	1465	Tie Rod	63	9341	Decal, Front Plate						
3	1415	Rod End - Left Hand Thread	64	5946	Decal, Steering Wheel						
4	9092	Nut, 3/8-24 Right Hand Thread	65	1441	Scuff Pad, Floor Pan						
5	1414	Rod End - Right Hand Thread	66	9176	Bolt, 5/16-18 x 1" Key, 1/4"Square x 1-3/4"						
6	9024	Nut, 3/8-24 Left Hand Thread	67	6123	Washer, 3/4" Flat						
7	9146	Bolt, 3/8-16 x 1-1/2"	68	1194							
8	9091	Washer, 3/8 Flat	69	1607	Front Plate Front Bar						
9	9085	Nut, 3/8-16 Lock	70	9748-2	Center Bar						
10	2457	Spindle - Right Side	71	9746-2	Overhead Bar						
NI	2458	Spindle - Left Side	72	9749-2	Rear Upright						
11	5682	Bolt, 1/2-13 x 5-1/2"	73	9747-2	Screw, 12-24 x 1/2" Self Tapping						
12	1012	Nut, 1/2-13 Toplock	74 75	9796 1389	Bushing						
13	5157	Spacer, 5/8" x 3/4"	75 76	2386	Bolt, 3/8-16 x 3-1/2"						
14	1046	Nut, 5/8-11 Toplock	70 77	6452	Bolt, 3/8-16 x 5"						
15	9509P	Frt. Wheel Assembly (incl. 16-19)	77 78	1447	Bolt, 5/16-18 x 1-3/4" Shoulder						
16	5090	Bearing	70 79	1846	Bolt, 1/4-20 x 3/4"						
17	5950	Spanner	80	9145	Bolt, 3/8-16 x 1-3/4"						
18	4915	Tire, 145/70 x 6" Knobby	81	1847	Bolt, 1/4-20 x 1"						
19	3802	Tube, 6"	82	1848	Bolt, 1/4-20 x 1-1/4"						
20		TO Section and the Company of the Section of the Se	ASM	9799	Stop Switch Asm (incl. 83-85)						
21		hair think that the first that the first the the second of	83	1392	Stop Switch						
22		The state of the s	84	1393	Ring Terminal						
23		D	85	1394	Wire, 50" with Splice Connector						
ASM	3554	Rear Wheel Assembly (incl. 24,25)	86	1406	Wire, to Engine						
24	3552	Wheel - 8" Gold	87	9502	Spring, Left Wound						
25	3548	Tire, 18/9.5 x 8" Tube, 8" (Repair Part Only)	88	9503	Spring, Right Wound						
NI	1430	Nut, 3/4-10 Toplock	89	9597	Caliper (see Caliper Breakdown)						
26	9162	Spacer, 1" ID x 3-9/16"	ASM	9798*	Foam Replacement Kit (incl. 90-92)						
27	1448 1760	Bearing Flange	90	9758*	Foam, 43"						
28 29	3941	Bearing	91	9808*	Foam, 10"						
30	2265	Spacer, 1" ID x 3/4"	92	9759*	Foam, 30"						
31	1189	Nut, 5/16-18 Toplock	93	9776	Clamp, 3/4"						
32	9740	Axle	94	9361	Decal, Floor Pan						
ASM	6420	Sprocket Assembly (incl. 33-36)	95	2832	Decal, Warning - No Passengers						
33	6282	Sprocket, 54 Teeth 420 Chain	96	4504	Decal, Warning - Yellow Decal, Warning: Wear Helmet						
34	6701	Bolt, 5/16-18 Socket Head	97	6540							
35	6280	Sprocket Hub	98	8138	Decal, Warning: Entanglement Decal, Age Restriction						
36	1876	Bolt, 1/4-20 x 5/8" Whiz	99	8154	Axle Guard Repair Kit						
37	9680	Key, 1/4" x 3/8" x 1-1/4" Long	100	K285-18	Engine Owner's Manual (285-191)						
38	1775	Key, 1/4" Square x 1-1/4" Long	NI	2684D	Engine Owner's Manual (285-192)						
39	9511	Brake Rotor	NI	2684E	Vehicle Operator's Manual						
40	1854	Washer, #14 Flat	NI	6477	Assembly Instructions						
41	9744-2	Brake Rod	NI	9247R4	Assembly mandenons						
42	1436	Brake Pedal		ASM = As	seamhly						
43	1437	Throttle Pedal									
44	9057	Nut, 1/4-20 Toplock		NI = Not I	y Black, Pink, White, or Yellow						
45	1390	Throttle Cable (incl. 46)									
46	9058	Nut, 5/16-24 Jam		0011) - 28.50 she Pad						
47	2264	Bolt, 5/16-18 x 3/4"		9816							
48	5159	Seat Back		Br	che Pad						
49	5160	Seat Bottom		75							
50	6320	Headrest Pad									
51	1849	Bolt, 1/4-20 x 1-1/2"									
52	6038	Steering Wheel									
53	9080	Bolt, 1/4-20 x 2-3/4"									
54	9160	Bolt, 1/4-20 x 7/8" with Nylock									
55	5839	Bolt, 1/4-20 x 3/4" Whiz Flange									
56	9022	Washer, 1/2" Flat									
57 50	5681	Spring Pedal Latch									
58 50	1982										
59 60	1019 1463	Ty-Wrap Bushing, Plastic									
00	1400	Duorinia,									

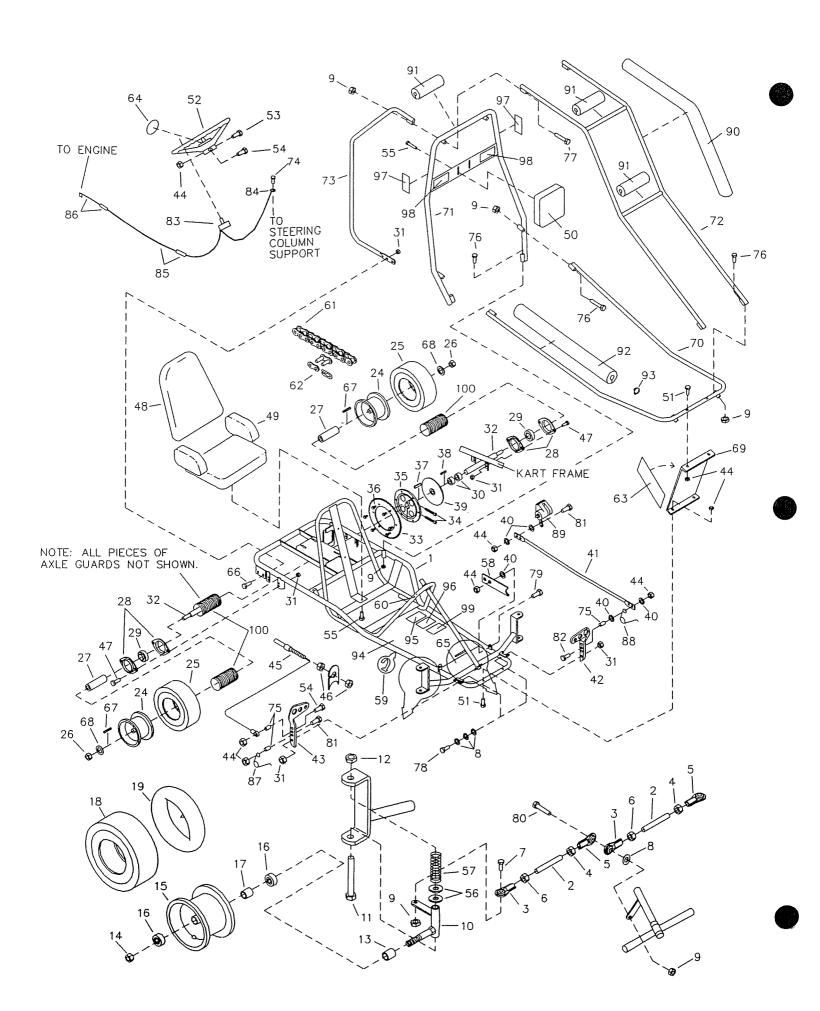

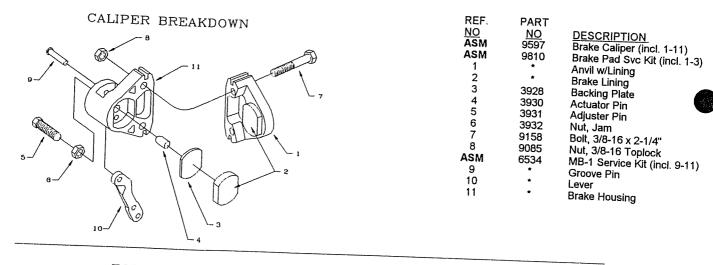

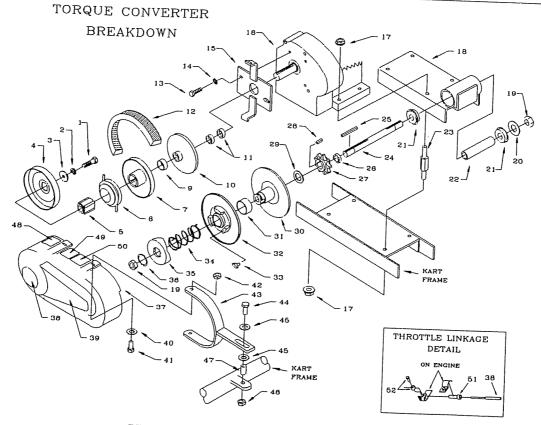

REF. NO. 1 2 3 ASM 4 5 6 7 9 10 11 12 13 14 15 16 17 18 19	PART NO 1454 1124 1398 5957 * * 200349 * 1442 5959 9101 9030 1494 9661 9737 1263 1110 1136	DESCRIPTION Bolt, 5/16-24 x 1.75" Washer, 5/16 Split Lock Washer, Flat Driver Pulley Assembly (Incl. REF. 4-10) Drum Hub Shoe Assembly Moveable Sheave Bushing Stationary Sheave Spacer, 3/4ID x .250" Belt, Asymmetrical Bolt, 5/16-24 x .5" Washer, 5/16 Interlock Mounting Bracket Engine, 5hp (285-191) Engine, 5.5hp (285-192) Nut, 5/16-18 Flange Chassis Nut, 5/8-18 Top Lock	REF. NO 20 21 22 23 24 25 26 27 28 29 ASM 30 31 32 33 34 35 36 37 38	PART NO 1469 5090 1116 1356 1118 3403 1937 1125s 1031 1119 5958 * * 6804 6805 * 2477 1542 1390	DESCRIPTION Spacer, 5/8ID x .062" Bearing Spanner Stud Jackshaft Key, 3/16sq x 2" Spacer, 5/8ID x .25" Sprocket, 9T #420 Key, 3/16sq x .5" Spacer, 5/8ID x .125" Driven Pulley Assembly (Incl. REF. 30-36) Stationary Sheave Bushing Moveable Sheave Button, Nylon Spring Cam Retaining Ring Cover Throttle Cable	ASIV	PART NO 9333 2279 2277 2278 1537-2 1846 1854 9057 1389 6958 4912 1049 1628 1018 9677 9678 5964 Not Available = Assembl	DESCRIPTION Decal Washer, #8 Flat Screw, #8 x .5" Nut, #8 Lock Bracket Bolt, 1/4-20 x .75" Washer, 1/4 Flat Nut, 1/4-20 Lock Bushing Decal, Tire Pressure Decal, Warning: This Guard Decal, Warning:Drive Cover Throttle Cable Retainer Throttle Cable Retainer Throttle Cable Stop Decal, Hot Surfaces Decal, Engine Exhaust Decal, Oil Warning
---	---	--	---	---	---	------	---	--

Throttle Cable

NI = Not Illustrated