


RUNNING LIGHT INSTALLATION INSTRUCTIONS

For Model 426

Tools Required

Qty	Description
2	9/16 Open End Wrenches
1	Side Cutters to trim ty-wraps

1. Install the mounting brackets for the lights between the bushings that hold the headrest on with the flange of the bracket going towards the back of the kart.

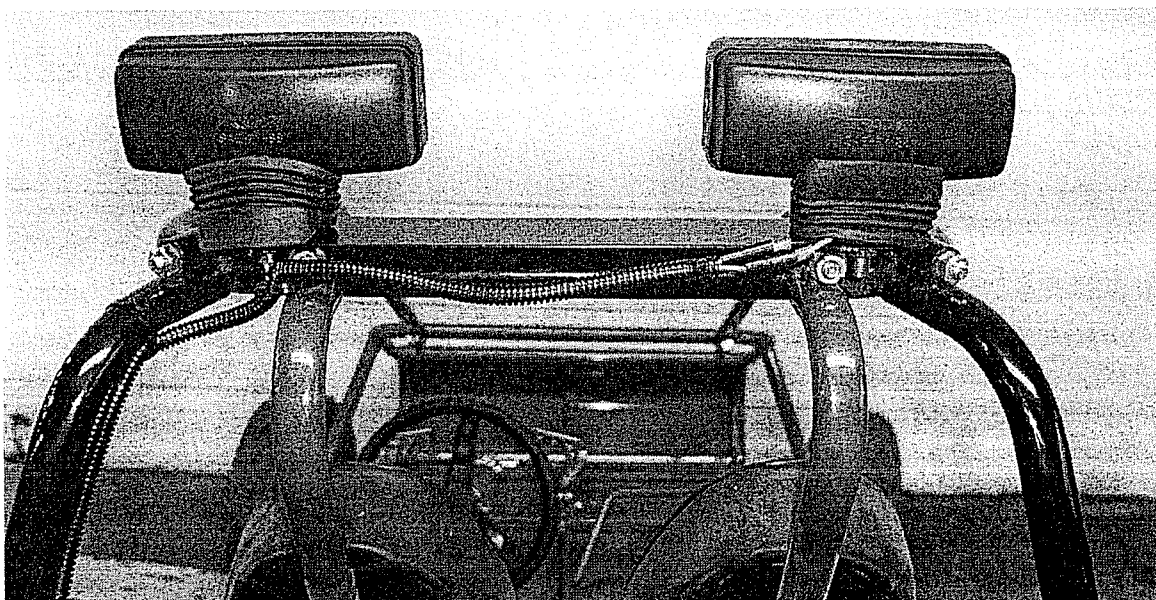

2. Mount the lights through the hole in the mounting bracket.
3. Route the wiring harness along the left side of the kart going down the rear bars to the frame. Then run the wires on the frame straight forward till you get to the front of the engine then go right to plug into the front of the engine.
4. Plug the light kit wires into the two female bullet connectors on the engine.
5. Ty-wrap the wiring harness to the bars.
6. Start the engine to check the operation of the running lights and the **STOP SWITCH** mounted on the steering wheel of the kart.

WARNING: If the **STOP SWITCH** does not stop the **ENGINE**, the kart **MUST NOT** be operated until the **STOP SWITCH** functions correctly.